

# Owner's Manual

## USB 3.1 Gen 1 USB-C Docking Station

Models: U442-DOCK1, U442-DOCK1-B

Este manual esta disponible en español en la página  
de Tripp Lite: [tripplite.com/support](http://tripplite.com/support)

Ce manuel est disponible en français sur le site Web  
de Tripp Lite : [tripplite.com/support](http://tripplite.com/support)

Русскоязычная версия настоящего руководства представлена на  
веб-сайте компании Tripp Lite по адресу: [tripplite.com/support](http://tripplite.com/support)

### WARRANTY REGISTRATION

Register your product today and be  
automatically entered to win an ISOBAR®  
surge protector in our monthly drawing!

[tripplite.com/warranty](http://tripplite.com/warranty)



1111 W. 35th Street, Chicago, IL 60609 USA • [tripplite.com/support](http://tripplite.com/support)

Copyright © 2021 Tripp Lite. All rights reserved.

## Package Contents

- U442-DOCK1 (Silver) or U442-DOCK1-B (Black)
- Owner's Manual

## Optional Accessories

- N201-Series Cat6 Gigabit Snagless Patch Cables
- P312-Series 3.5 mm Mini Stereo Audio Cables
- P502-Series High-Resolution VGA Cables
- P566-Series HDMI to DVI Adapter Cables
- P568-Series High-Speed HDMI Cables
- P583-Series MDP to DP Adapter Cables
- P584-Series MDP Cables
- U322-Series USB 3.0 A/B Device Cables
- U326-Series USB 3.0 Micro-B Device Cables
- U420-003 USB 3.1 Gen 1 USB-C M/M Cable, 3 ft.

## System Requirements

- Computer with USB-C™ port that supports USB DisplayPort Alternate Mode
- DisplayPort\*, Mini DisplayPort, VGA, DVI\* or HDMI monitor
- Ethernet network with speeds up to 10/100/1000 Mbps

\*Requires an adapter. See **Optional Accessories**.

*USB Type-C and USB-C are trademarks of USB Implementers Forum*


## Product Features

- Supports USB DisplayPort Alternate Mode for connecting VGA, HDMI or Mini DisplayPort (mDP) monitor via USB-C port
- Supports connection of DVI monitor via HDMI to DVI adapter (see **Optional Accessories**)
- Supports connection of DisplayPort monitor via mDP to DisplayPort adapter (see **Optional Accessories**)
- Allows the use of 2 monitors simultaneously to facilitate multitasking and increased productivity
- mDP and HDMI ports support video resolutions up to 3840 x 2160 (4K x 2K) @ 30 Hz
- VGA port supports video resolutions up to 1920 x 1200 (including 1080p) @ 60 Hz
- Ethernet port supports true 10/100/1000 Mbps network speeds
- USB-A hub ports support data transfer rates up to 5 Gbps
- Dedicated 5V/1.5A USB port provides fast charging power to mobile devices

## Product Features


- Micro SD and SD/MMC memory card slots support external memory access
- USB-C charging port supports power input up to 20V 3A (60W)
- 15W of USB-C input power dedicated to unit and its USB hub ports with remaining power going to USB-C device the unit is connected to
- 3.5 mm mini stereo jack for connecting speaker or microphone
- Automatically resumes operation from hibernation and suspend modes
- Complies with IEEE 802.3az (Energy Efficient Ethernet)
- Supports full- and half-duplex operations
- Supports IPv4 and IPv6 pack Checksum Offload Engine (COE) to reduce CPU loading
- Supports Wake-on-LAN
- Plug and play—no software, drivers or external power supply required

## Product Overview

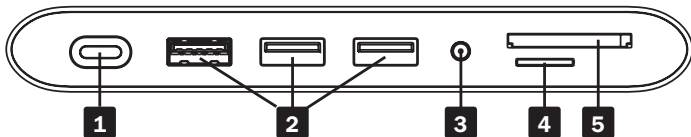

- 1 USB-C Port (Male):** Connects to USB-C device
- 2 USB 3.0 Ports (Female):** Connect up to 3 USB peripherals\*
- 3 3.5 mm Mini Stereo Port (Female):** Connects speaker or microphone
- 4 Micro SD Memory Card Slot:** Insert Micro SD memory card
- 5 SD/MMC Memory Card Slot:** Insert SD/MMC memory card

## Product Overview

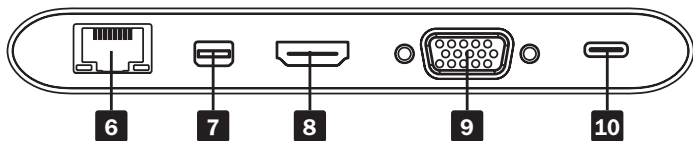

- 6 RJ45 Port (Female):** Connects to 10/100/1000 Mbps network
- 7 Mini DisplayPort (Female):** Connects mDP monitor
- 8 HDMI Port (Female):** Connects HDMI monitor
- 9 VGA Port (Female):** Connects VGA monitor
- 10 USB-C Charging Port (Female):** Connects device to USB-C charger

\*10W of power is dedicated to USB 3.0 ports when a USB charger is connected to the USB-C charging port. The hub port supports up to 5V 1.5A (7.5W). The other two ports support up to 5V 0.9A (4.5W) each. When maxing out one port's power, the other ports' power is reduced. All three ports will not be able to provide full power simultaneously, meaning external power may be required for some connected peripherals.

# Installation

## Notes:

- Supports the connection of 2 monitors simultaneously through DisplayPort MST mode.\*
- Only one memory card slot can be used at a time.
- When connected to power through USB-C charging port, 15W is dedicated to docking station and connected USB peripherals. Remaining power is used to charge connected USB-C device.
- See **Optional Accessories** section for suggested cables.
- When the unit is connected to the USB-C port on your computer and to a network via Cat5e/6 cabling, a network connection will be automatically established. If no connection is made, you can manually establish one by going to your computer's network settings page. For example, on a Mac you would navigate to the Network section found in System Preferences, click the 'Assist Me' button to get to the Network Setup Assistant, then follow the prompts to establish a connection.

\*See Multi-Monitor Requirements section for details.

1. Connect USB-C port to USB-C port on your laptop, tablet or other device.
2. Connect VGA port to VGA port on your monitor using a VGA cable.

**OR**

3. Connect HDMI port to HDMI port on your monitor using an HDMI cable.

**OR**

4. Connect mDP port to mDP port on your monitor using an mDP cable.
5. Connect USB 3.0 hub ports to USB peripherals.
6. Connect RJ45 port to Ethernet network using UTP cable.

## Installation

7. Connect 3.5 mm mini stereo port to speaker or microphone using 3.5 mm audio cable.
8. Insert Micro SD and/or SD/MMC card into corresponding slot to access external memory.
9. Charge device by connecting its USB-C charger to adapter's USB-C port.

## Multi-Monitor Requirements

The U442-DOCK1 and U442-DOCK1-B support the connection of two monitors simultaneously through DisplayPort MST (Multi-Stream Transport) mode. One of the monitors must be connected to the Mini DisplayPort video port. You will not be able to use an HDMI monitor and a VGA monitor simultaneously.

Take into account the following limitations when connecting two monitors at the same time.

### **Does the Source Computer Support DisplayPort MST?**

When connecting to a USB-C source that supports DisplayPort MST, the source will read the EDID information of both connected monitors as separate displays that can be used in mirror mode or extended mode.



## Multi-Monitor Requirements

When connecting to a USB-C source that does not support DisplayPort MST, such as a MacBook, SST (Single-Stream Transport) mode is used instead. Only the EDID of the first connected monitor is read by the source, forcing both monitors to display in mirror mode. The default resolution of the first monitor will be sent to the second monitor, which will display the same resolution. If the second monitor is incapable of supporting the same resolution as the first, no video will display on it. Before connecting the second monitor, the first monitor's resolution must be changed to the second monitor's resolution in order for video to display on both.

**Note:** The following table depicts the maximum resolution achieved on each video port, based on the connected monitors. Mac does not support DisplayPort MST; therefore, multiple monitor setups are not guaranteed.

<b>Windows Computer (4K @ 30 Hz)</b>	<b>VGA (1080p @ 60 Hz)</b>	<b>HDMI (4K @ 30 Hz)</b>	<b>Mini DP (4K @ 30 Hz)</b>
1 (4K @ 30 Hz)	2 (720p @ 60 Hz)	*	3 (4K @ 30 Hz)
1 (4K @ 30 Hz)	*	2 (1080p @ 60 Hz)	3 (4K @ 30 Hz)

\* Port not in use.

## Specifications

### Input Connectors

USB	USB-C (M)
Charging	USB-C (F)

### Output Connectors

USB-A	(3x) USB-A (F)
Ethernet	RJ45 (F)
VGA	VGA (F)
HDMI	HDMI (F)
Mini DisplayPort	mDP (F)
Audio	3.5 mm mini stereo (F)
Memory Cards	(1x) Micro SD, (1x) SD/MMC

### Environmental

Operating Temperature	32° to 113°F (0° to 45°C)
Operating Humidity	10% to 85% RH, Non-Condensing
Storage Temperature	14° to 158°F (-10° to 70°C)
Storage Humidity	5% to 90% RH, Non-Condensing

### Power Requirements

USB-C Charging Port	Supports up to 20V 3A (60W) input*
---------------------	------------------------------------

\*15W of power is dedicated to the unit: 5W to unit's functionality and 10W to the three USB hub ports. The remaining power goes to the USB-C device the unit is connected to.

# Warranty and Product Registration

## 3-Year Limited Warranty

Tripp Lite warrants its products to be free from defects in materials and workmanship for a period of three (3) years from the date of initial purchase. Tripp Lite's obligation under this warranty is limited to repairing or replacing (at its sole option) any such defective products. To obtain service under this warranty, you must obtain a Returned Material Authorization (RMA) number from Tripp Lite or an authorized Tripp Lite service center. Products must be returned to Tripp Lite or an authorized Tripp Lite service center with transportation charges prepaid and must be accompanied by a brief description of the problem encountered and proof of date and place of purchase. This warranty does not apply to equipment, which has been damaged by accident, negligence or misapplication or has been altered or modified in any way.

EXCEPT AS PROVIDED HEREIN, Tripp Lite MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Some states do not permit limitation or exclusion of implied warranties; therefore, the aforesaid limitation(s) or exclusion(s) may not apply to the purchaser.

EXCEPT AS PROVIDED ABOVE, IN NO EVENT WILL Tripp Lite BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF THIS PRODUCT, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE. Specifically, Tripp Lite is not liable for any costs, such as lost profits or revenue, loss of equipment, loss of use of equipment, loss of software, loss of data, costs of substitutes, claims by third parties, or otherwise.

## PRODUCT REGISTRATION

Visit [tripplite.com/warranty](http://tripplite.com/warranty) today to register your new Tripp Lite product. You'll be automatically entered into a drawing for a chance to win a FREE Tripp Lite product!\*

\* No purchase necessary. Void where prohibited. Some restrictions apply. See website for details.

## FCC Notice, Class B

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

## Warranty and Product Registration

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications to this equipment not expressly approved by Tripp Lite could void the user's authority to operate this equipment.

### WEEE Compliance Information for Tripp Lite Customers and Recyclers (European Union)



Under the Waste Electrical and Electronic Equipment (WEEE) Directive and implementing regulations, when customers buy new electrical and electronic equipment from Tripp Lite they are entitled to:

- Send old equipment for recycling on a one-for-one, like-for-like basis (this varies depending on the country)
- Send the new equipment back for recycling when this ultimately becomes waste

Use of this equipment in life support applications where failure of this equipment can reasonably be expected to cause the failure of the life support equipment or to significantly affect its safety or effectiveness is not recommended. Do not use this equipment in the presence of a flammable anesthetic mixture with air, oxygen or nitrous oxide.

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Photos and illustrations may differ slightly from actual products.



1111 W. 35th Street, Chicago, IL 60609 USA • [triplite.com/support](http://triplite.com/support)